

06-16-00

EK483548748US

6-15-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket No. AUS000111US1

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of Inventor(s):

Richard Anthony MarinoFor: **Hardware Perspective Correction of Pixel Coordinates and Texture Coordinates**

Enclosed are also:

- ☒ 30 Pages of Specification including an Abstract
☒ 5 Pages of Claims
☒ 10 Sheet(s) of Drawings
☒ A Declaration and Power of Attorney
☒ Form PTO 1595 and assignment of the invention to IBM Corporation

CLAIMS AS FILED

FOR	Number Filed		Number Extra		Rate		Basic Fee (\$690)
Total Claims	12	-20 =	0	X	\$ 18	=	\$0
Independent Claims	5	-3 =	2	X	\$ 78	=	\$156
Multiple Dependent Claims	0			X	\$260	=	\$0
Total Filing Fee							= \$846

☒ Please charge \$846 to IBM Corporation, Deposit Account No. 09-0447.☒ The Commissioner is hereby authorized to charge payment of the following fees associated with the communication or credit any over payment to IBM Corporation, Deposit Account No. 09-0447. A duplicate copy of this sheet is enclosed.☒ Any additional filing fees required under 37CFR § 1.16.☒ Any patent application processing fees under 37CFR § 1.17.

Respectfully,

Mark E. McBurney

Reg. No. 33,114

Intellectual Property Law Dept.

IBM Corporation

11400 Burnet Road 4054

Austin, Texas 75758

Telephone: (512) 823-1003

JC571 U.S. PTO
09/594630
06/15/00JC780 U.S. PTO
06/15/00

09594630-061500

Docket No. AUS000111US1

**HARDWARE PERSPECTIVE CORRECTION OF PIXEL
COORDINATES AND TEXTURE COORDINATES**

BACKGROUND OF THE INVENTION

5

1. Technical Field:

10 The present invention relates generally to improved data processing system and in particular to a method and apparatus for processing graphics data. Still more particularly, the present invention relates to a method and apparatus for correcting pixel coordinates and texture coordinates.

2. Description of Related Art:

15 Data processing systems, such as personal computers and work stations, are commonly utilized to run computer-aided design (CAD) applications, computer-aided manufacturing (CAM) applications, and computer-aided software engineering (CASE) tools. Engineers, scientists, technicians, and others employ these applications daily. These applications involve complex calculations, such as finite element analysis, to model stress in structures. Other applications include chemical or molecular modeling applications.

25 CAD/CAM/CASE applications are normally graphics intensive in terms of the information relayed to the user. Data processing system users may employ other graphics intensive applications, such as desktop publishing applications. Generally, users of these applications

30 require and demand that the data processing systems be able to provide extremely fast graphics information.

005760"0834560

Docket No. AUS000111US1

005463-061000

The processing of a graphics data stream to provide a graphical display on a video display terminal requires an extremely fast graphics system to provide a display with a rapid response. In these types of graphics systems, primitives are received for processing and display. A primitive is a graphics element that is used as a building block for creating images, such as, for example, a point, a line, a triangle, a polygon, or a quadrilateral. A primitive is defined by a group of one or more vertices. A vertex defines a point, an end point of an edge, or a corner of a polygon where two edges meet. Data also is associated with a vertex in which the data includes information, such as positional coordinates, colors, normals, and texture coordinates. Commands are sent to the graphics system to define how the primitives and other data should be processed for display.

With the large amounts of data and computations involved in processing graphics data, especially with three-dimensional applications, many of these computations have been offloaded from the central processing units to a graphics adapter. These geometry calculations have been accelerated by using a multiprocessor system or a hardwired geometry engine in the graphics adapter. Multiprocessing allows flexibility to implement future processes or algorithms, but is difficult to program and adds to the cost and time needed to develop a graphics adapter. On the other hand, hardwired geometry engines are very straight forward to program. With hardwired geometry engines, it is desirable to optimize the hardware implementing these

graphics functions within these engines to minimize the time needed to perform the graphic functions. Some of these functions include, for example, transforming coordinates from one coordinate system to another coordinate system, scaling coordinates, clipping objects, and rotating objects.

Therefore, it would be advantageous to have an improved method and apparatus for implementing graphic functions in a manner that reduces the time needed to perform these functions.

Docket No. AUS000111US1

SUMMARY OF THE INVENTION

5 The present invention provides a method and
apparatus in a graphics system. The graphics system
includes an input, wherein the input receives graphics
data, wherein the graphics data includes position
coordinates and a depth coordinate for an object. An
output is present in which the output transmits processed
10 graphics data. The graphics system also contains a
plurality of processing elements, wherein the plurality
of processing elements generates the processed graphics
data. A first processing element within the plurality of
processing elements is connected to the input and a last
15 processing element within the plurality of processing
elements is connected to the output. A selected
processing element within the plurality of processing
element receives the position coordinates and the depth
coordinate, inverts the depth coordinate to form an
20 inverted depth coordinate, and multiplies the position
coordinates by the inverted depth coordinate.

0954450 "04400"

Docket No. AUS000111US1

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use, further objectives and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

Figure 1 is a pictorial representation of a data processing system in which the present invention may be implemented in accordance with a preferred embodiment of the present invention;

Figure 2 is a block diagram of a data processing system in accordance with a preferred embodiment of the present invention;

Figure 3 is a diagram illustrating processing graphics data in accordance with a preferred embodiment of the present invention;

Figure 4 is a block diagram of a geometry engine in accordance with a preferred embodiment of the present invention;

Figure 5 is a diagram illustrating vertex fragment descriptions in accordance with a preferred embodiment of the present invention;

Figure 6 is a table illustrating fragments affected in a particular stage in accordance with a preferred embodiment of the present invention;

Figure 7 is a table illustrating fragments required in a particular stage in accordance with a preferred

09594630-061500

embodiment of the present invention;

Figures 9A and **9B** are block diagrams of a perspective division unit in accordance with a preferred embodiment of the present invention;

Figure 11 is a diagram of a state machine used to control a first stage in the perspective division unit in accordance with a preferred embodiment of the present invention;

Figure 13 is a diagram illustrating data flow in accordance with a preferred embodiment of the present invention.

Docket No. AUS000111US1

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

With reference now to the figures and in particular with reference to **Figure 1**, a pictorial representation of a data processing system in which the present invention may be implemented is depicted in accordance with a preferred embodiment of the present invention. A computer **100** is depicted which includes a system unit **110**, a video display terminal **102**, a keyboard **104**, storage devices **108**, which may include floppy drives and other types of permanent and removable storage media, and mouse **106**. Additional input devices may be included with personal computer **100**, such as, for example, a joystick, touchpad, touch screen, trackball, microphone, and the like. Computer **100** can be implemented using any suitable computer, such as an IBM RS/6000 computer or IntelliStation computer, which are products of International Business Machines Corporation, located in Armonk, New York. Although the depicted representation shows a computer, other embodiments of the present invention may be implemented in other types of data processing systems, such as a network computer. Computer **100** also preferably includes a graphical user interface that may be implemented by means of systems software residing in computer readable media in operation within computer **100**.

Turning next to **Figure 2**, a block diagram of a data processing system is depicted in accordance with a preferred embodiment of the present invention. Data processing system **200** is an example of components used in

a data processing system, such as computer **100** in **Figure 1**. Data processing system **200** employs a bus **202** in the form of a peripheral component interconnect (PCI) local bus architecture. Although the depicted example employs a PCI bus, other bus architectures such as Accelerated Graphics Port (AGP) and Industry Standard Architecture (ISA) may be used. Processing unit **204**, memory **206**, and graphics adapter **208** are connected to bus **202** in these examples. Processing unit **204** includes one or more microprocessors in the depicted example.

Graphics adapter **208**, in this example, processes graphics data for display on display device **210**. The graphics data is received from applications executed by processing unit **204**. Graphics adapter **208** includes a raster engine **212**, a geometry engine **214**, a frame buffer **216**, and a video controller **218**. Raster engine **212** receives the graphics data from the application. In these examples, raster engine **212** contains the hardware and/or software used to rasterize an image for display. Raster engine **212** is used to turn text and images into a matrix of pixels to form a bitmap for display on a screen. In the depicted example, raster engine **212** sends the received graphics data to geometry engine **214**, which provides the functions for processing primitives and other graphics data to generate an image for raster engine **212** to process. The processed data is then passed back to raster engine **212**. The mechanisms of the present invention are located in geometry engine **214** in these examples.

30 Frame buffer **216** is an area of memory used to hold a

Docket No. AUS000111US1

frame of data. Frame buffer **216** is typically used for screen display and is the size of the maximum image area on the screen. Frame buffer **216** forms a separate memory bank on graphics adapter **208** to hold a bit map image while it is "painted" on a screen. Video controller **218** takes the data in frame buffer **216** and generates a display on display **210**. Typically, video controller **218** will cycle through frame buffer **216** one scan line at a time.

Turning now to **Figure 3**, a diagram illustrating processing of graphics data is depicted in accordance with a preferred embodiment of the present invention. Processing of graphics data can be divided into three stages. In the first stage, application **300** generates graphics data for display. The stages always run on the main central processing unit of the computer, such as, for example, processing unit **204** in **Figure 2**. The data generated is used to represent an object as a series of points or vertices that are connected in a predetermined fashion based on the type of primitive application **300** is currently rendering. The second stage involves geometry engine **302**, which is responsible for transforming incoming vertices received from application **300** into a form for viewing on a display. Typically, along with the transforming vertices, geometry engine **302** is responsible for generating color contributions from lighting sources, generating fog factors that allow an object to become less visible based on the distance from the viewer, and clipping a scene to a given view volume. Geometry engine **302** may be implemented either in a central processing

Docket No. AUS000111US1

unit or an adapter. In these examples, geometry engine **302** is implemented as geometry engine **214** and graphics adapter **208** in **Figure 2**. The third stage, raster engine **304**, takes the vertices that have been transformed into
5 screen coordinates and interpolates the colors or maps an image between the vertices to turn a vertex representation of an object into a solid object. In this example, raster engine **304** may be implemented as raster unit **212** in graphics adapter **208** in **Figure 2**. This
10 information is then sent to display **306**. In the depicted examples, geometry engine **302** is a hardwired geometry engine as opposed to a multi-processor engine.

The present invention provides an apparatus to perform coordinate correction functions, which are
15 normally performed in software. More specifically, the mechanism of the present invention provides an ability to correct both pixel coordinates and texture coordinates within geometry engine **214** in **Figure 2**. Pixel coordinates are X, Y, and Z coordinates, while texture
20 coordinates are S, T, R, and Q coordinates. The present invention provides an improved method and apparatus for correcting or manipulating these coordinates within a single stage or processing element within geometry engine **302** in **Figure 3** in these examples. These functions are
25 implemented in a single processing element within geometry engine **302** in these examples.

Turning now to **Figure 4**, a block diagram of a geometry engine is depicted in accordance with a preferred embodiment of the present invention. Geometry
30 engine **400** illustrates stages or processing elements, which may be implemented in a geometry engine, such as

Docket No. AUS000111US1

geometry engine **214** in **Figure 2**. Geometry engine **400**, in this example, includes a geometry unit **402**, a raster interface unit **404**, and a raster interface unit **406**.

Data is received by raster interface unit **404** for

5 processing within geometry unit **402**. The data is received from a raster engine, such as raster engine **210** in **Figure 2**. Processed data is returned to the raster engine using raster interface unit **406**. The mechanism of the present invention is implemented within the
10 processing elements in geometry unit **402**. Specifically, the processing elements implement equations in hardware to process graphics data. The mechanism of the present invention reduces the complexity of the hardware by optimizing the equations in a simpler form and
15 implementing these simplified equations in the processing elements.

Geometry unit **402**, in this example, is a graphics pipeline containing a set of processing elements, which include a vertex packer unit **408**, a normal/model view
20 transformation unit **410**, a normalize unit **412**, a texture coordinate generation unit **414**, a lighting unit **416**, a texture/projection transformation unit **418**, a clipping unit **420**, a fog factor generation unit **422**, a perspective divide unit **424**, a viewport transformation unit **426**, and
25 a vertex funnel unit **428**. These processing elements also are referred to as "stages".

Vertex packer unit **408** is the top stage of a geometry unit and assembles attribute fields for a vertex. A vertex defines a point, an end point of an
30 edge, or a corner of a polygon where two edges meet.

005730" 0E94650

Docket No. AUS000111US1

Each vertex contains every possible fragment of data used by any stage in the geometry pipeline. These fragments are data, such as, for example, positional coordinates, colors, normals, and texture coordinates. Normal/model
5 view transformation unit **410** is used to transform a normal vector from object space into eye space. The transformation is dependent on the model view transformation, which is an inverse transpose of the model view matrix. The model view transformation in
10 normal/model view transformation unit **410** transforms object coordinates into eye coordinates by translating, scaling, and rotating objects.

Normalize unit **412** changes the normal vector to a vector of unit length, having a magnitude of 1.0, while
15 preserving the direction of the original vector. Texture coordinate generation unit **414** generates texture coordinates used for displaying texture for a primitive. Texture coordinate generation unit **414** generates texture coordinates, such as object linear, eye linear, and
20 spherical.

Lighting unit **416** computes shading and colors for each vertex. Specifically, lighting unit **416** generates the color of each vertex of an object based on the orientation of the object, the material properties of the
25 object, the properties of the scene, and any defined light sources. Texture/projection transformation unit **418** transforms texture coordinates by translating, scaling, and rotating objects. Additionally, texture/projection transformation unit **418** transforms eye
30 coordinates into clip coordinates, moving objects into a "viewing volume", by translating, scaling, and rotating

005790" DE 94650

Docket No. AUS000111US1

objects. Typically this volume is a cube with extents of $\pm W$ that is orthogonal to the XYZ coordinate system.

Prospective projection makes an object further away appear smaller, while orthogonal projection does not make
5 objects appear smaller when they are further away.

Clipping unit **420** clips objects to a viewing volume. Fog factor generation unit **422** is used to make an object fade into the distance (atmospheric effects) by making objects further away from the viewer less visible.

10 Perspective divide unit **424** is used to transform clip coordinates to normalize device coordinates $[-1, +1]$ by dividing a fourth coordinate W . The mechanism of the present invention is implemented within perspective divide unit **424** in these examples. The mechanism of the
15 present invention provides for correction of both pixel coordinates (X , Y , and Z) and texture coordinates (S , T , R , and Q) using W . Viewpoint transformation unit **426** is used to transform normalized device coordinates into screen or window coordinates. Device coordinates are
20 coordinates used by the adapter to display images. Normalized device coordinates are device coordinates that are normalized to between 0 and 1.

Further, the mechanism of the present invention adjusts these coordinates using multiplication, rather
25 than division. Instead of dividing the coordinates by the depth value W , a reciprocal of the depth value W is generated. This reciprocal, $1/W$ is multiplied with the pixel coordinates and texture coordinates. In addition, the mechanism of the present invention uses two stages.
30 In the first stage the reciprocal of the depth value W occurs. A first FIFO in this stage is used to hold the

Docket No. AUS000111US1

pixel coordinates and the texture coordinates until the reciprocal of the depth value is generated. When the second stage receives the reciprocal of W and the pixel coordinates and the texture coordinates, multiplication of the pixel coordinates and the texture coordinates occurs. The mechanism of the present invention allows for multiplication of all of these coordinates in the same amount of time, which is five clock cycles in this example.

Vertex funnel unit **428** takes fragments of vertices and places them on a bus for use by the raster interface unit. In this example, the fragments are funneled into a 64-bit data word for transfer on the bus.

The fragments and stages illustrated in geometry unit **402** are based on fragments and operations specified in OpenGL, which is defined in The OpenGL Graphics System: A Specification (Version 1.2), which is available from Silicon Graphics, Inc.

In this example, geometry engine **400** received data at vertex packer unit **408** one word at a time. The resulting vertex is sent to the raster engine one word at a time.

Turning now to **Figure 5**, a diagram illustrating vertex fragment descriptions is depicted in accordance with a preferred embodiment of the present invention. Table **500** illustrates different fragments, which make up a vertex. Column **502** illustrates fragments and their uses in a geometry engine in column **504** and in a raster engine in column **506**. These fragments are assembled in vertex packer **408** in **Figure 4** and contain the information used to describe that particular vertex.

Docket No. AUS000111US1

As a vertex travels through a geometry pipeline, such as geometry engine **400**, a given fragment, such as those illustrated in **Figure 4** may be updated based on the programming of the stage to affect that particular
 5 fragment. When a fragment no longer has meaning to subsequent stages, the fragment ceases to be passed down the pipeline. Each stage or processing element in a geometry pipeline is programmed with a simple enable command to either affect a given vertex fragment or pass
 10 that data from the previous stage to its output.

Turning to **Figure 6**, a table illustrating fragments affected in a particular stage is depicted in accordance with a preferred embodiment of the present invention. Table **600** illustrates a breakdown of stages, such as
 15 those in geometry engine **400** in **Figure 4**, and fragments that may change based on the programming of a particular stage. Table **600** includes a column **602** identifying in different stages. Fragments affected are illustrated in column **604**, which identifies different fragments that are
 20 affected by commands shown in column **606**. These commands are used to enable and disable processing of various fragments in the stages identified in table **600**. In particular, the illustrated example below shows selective enabling of a lighting stage as well as an ability to
 25 combine fragments f_{ad} , f_s , b_{ad} , and b_s with data generated by the lighting stage.

In **Figure 7**, a table illustrating fragments required in a particular stage is depicted in accordance with a preferred embodiment of the present invention. Table **700**
 30 illustrates stages in column **702** and the fragments required for each stage in column **704**. In this example,

Docket No. AUS000111US1

the lighting stage generates lighting effects using the following fragments: n_x , n_y , n_z , cc_a , cc_r , cc_g , cc_b , and PSc. The fragments f_{ad} , f_s , b_{ad} , and b_s are those received from a source outside of the pipeline, such as an application executing on a host processor. The mechanism of the present invention allows for just selecting the output from the lighting stage or combining that output with the fragments received from the source.

Alternatively, the fragments received from the source may be passed through the lighting stage unaffected.

Turning now to **Figure 8**, a table illustrating signals used to transfer data between stages is depicted in accordance with a preferred embodiment of the present invention. Data transfer between stages is used to pass two types of data in these examples, command data and vertex data. Two types of commands may be transferred. One is a command data pair containing a word of command and a word of data. Another type of command involves data strands in which a word of command is present and multiple words of data are present.

Table **800** illustrates a set of signals valid, ready, cmdBit, and cdSelect used to transfer data between stages in column **802**. Whether a transfer is to occur is illustrated in columns **804** and **806**. Applicability of a signal to transfer a command is illustrated in column **808**. Applicability of the signal to transfer a word of data is shown in column **810**. Applicability in transferring a vertex is shown in column **812**. The valid signal indicates that there is either a command, data, or vertex that needs to be sent to the subsequent stage. The ready signal indicates whether a stage is ready to

Docket No. AUS000111US1

transfer data. As can be seen, this signal is applicable to command, data, and vertices. The signal cmdBit indicates that a command is to be transferred over the interface. The signal cdSelect is used to indicate whether command data, rather than vertex data is present. These signals take into account that commands as well as x and y coordinates data are sent over the same lines within geometry unit **402** in **Figure 4**.

Turning now to **Figures 9A** and **9B**, a block diagram of a perspective division unit is depicted in accordance with a preferred embodiment of the present invention. Section **900** and section **902** provide a more detailed illustration of perspective division unit **424** in **Figure 4**.

In identifying signals in these figures, T_FG indicates that the signal is for the factor generation unit, and VTX is for vertex. Section **900** of the perspective division unit forms a pass through section for this unit. Section **902** performs the perspective division of pixel coordinates and texture coordinates in accordance with a preferred embodiment of the present invention. Further, the perspective division unit contains two stages, a first stage **923** and a second stage **925**. First stage **923** is the stage in which a reciprocal of the depth value, W, is generated. Second stage **925** is the stage in which the multiplication of the reciprocal of the depth value is multiplied with the pixel coordinates and the texture coordinates.

In section **902**, control data is stored in FIFO1 control **904**. This control data includes various vertex streaming commands, such as ENABLE_PERSPECTIVEDIVISION,

Docket No. AUS000111US1

GE_TEX_PARMS0, GE_TEX_PARMS1, SHD_TEX_PARMS0,
SHD_TEX_PARMS1, and SAVE/RESTORE CONTEXT.

ENABLE_PERSPECTIVEDIVISION is a command used to enable
processing within the perspective division unit.

- 5 GE_TEX_PARMS0 is a command used to enable and disable
divide operations for texture coordinate variables, S0,
T0, R0, and Q0 when the perspective division unit is
enabled. GE_TEX_PARMS1 is a command used to enable and
disable divide operations for texture coordinate
- 10 variables, S1, T1, R1, and Q1 when the perspective
division unit is enabled. SHD_TEX_PARMS0 is a command
used to enable and disable divide operations for texture
coordinate variables, S0, T0, R0, and Q0 when the
perspective division unit is enabled. SHD_TEX_PARMS1 is
- 15 a command used to enable and disable divide operations
for texture coordinate variables, S1, T1, R1, and Q1 when
the perspective division unit is enabled. SAVE/RESTORE
CONTEXT is a command used to save or restore three bits
in a 32-bit word. In these examples, the three bits are
- 20 for enabling perspective division, enabling processing of
a first set of texture coordinates, and enabling
processing of a second set of texture coordinates. These
commands are passed through T_FG_VTX_X and T_FG_VTX_Y.
The command may be passed through T_FG_VTX and
- 25 T_FG_VTX_Y.

- Pass through fragments are stored in fragment FIFO1
906. FIFO1 control **904** and fragment FIFO1 **906** are part
of the first stage in the perspective division unit.
This control data and the fragments are received from fog
30 factor generation unit **908**, which is a fog factor
generation unit, such as fog factor generation unit **422**

Docket No. AUS000111US1

in **Figure 4**. AND gate **910** receives control data, such as a valid signal indicated by T_FG_VLD. Additionally, a control signal, SM1_RDY, and a ready signal, FIFO1_ready, are input into AND gate **910**. The ready signal is
5 generated when fragment FIFO1 has room to receive additional fragments. SM1_ready is received from a state machine, which is described in more detail in **Figure 11** below. AND gate **912** is used to generate a ready signal, T_PD_ready, to fog factor generation unit
10 **908** when the perspective division unit is ready to receive additional fragments for processing. AND gate **912** receives an SM1_RDY signal from the state machine and a FIFO1_ready signal from FIFO1 control **904**.

AND gate **914** and AND gate **916** are used to transfer
15 fragments and control data from FIFO1 control **904** and fragment FIFO1 **906** to FIFO2 control **918** and fragment FIFO2 **920**. FIFO2 control **918** and fragment FIFO2 **920** form a second stage in the perspective division unit.

AND gate **914** receives a valid signal, FIFO1_valid, a
20 ready signal, FIFO2_ready_out, and an SM2_RDY signal. The valid signal is generated by FIFO1 control **904** when W has been inverted. The ready signal is generated by FIFO2 control **918** when the viewport transformation stage is ready to receive data. The SM2_RDY signal is
25 generated by a state machine, which is described in more detail below with respect to **Figure 12**. AND gate **914** generates valid signal, STAGE2_VALID, when all the data has been received and the calculations have been completed.

30 In **Figure 9B**, pixel coordinates and texture

Docket No. AUS000111US1

coordinates are received in fragment FIFO1 **906** in section **902** of the perspective division unit. Pixel coordinates for coordinates X, Y, and Z are received by fragment FIFO1 **906** as indicated by signals T_FG_VTX_X, T_FG_VTX_Y, and T_FG_VTX_Z, respectively. Additionally, multiplexer **922** receives a Y coordinate, T_FG_VTX_Y, and a save context signal. Multiplexer **922** is used to switch between new and restored data. Texture coordinates S, T, R, and Q also are received in fragment FIFO1 **906**. In this example, two sets of texture coordinates may be received, as indicated by signals T_FG_VTX_S0, T_FG_VTX_T0, T_FG_VTX_R0, T_FG_VTX_Q0, T_FG_VTX_S1, T_FG_VTX_T1, T_FG_VTX_R1, and T_FG_VTX_Q1. The values for these texture coordinates are output as texture coordinates S1, T1, R1, Q1, S2, T2, R2, and Q2, respectively. A depth value W also is received from fog factor generation unit **908** as indicated by signal T_FG_VTX_W. This depth value is processed by reciprocator **924** prior to being placed into W FIFO1 **926**, which is part of fragment FIFO1 **906**. Reciprocator **924** generates a reciprocal of the depth value to form $1/W$, as indicated by signal stage 1_W. Reciprocator **924** generates a reciprocal of W in five clock cycles in the depicted examples.

Multiplexers **928**, **930**, **932**, and **934** are used to select data for multipliers **936**, **938**, **940**, and **942**, respectively. These multiplexers receive data from fragment FIFO1 **906**. Latches **944-964** are used to hold data prior to sending the data to the multiplexers. Latches **966-972** are used to hold data from latches

928-934 prior to sending the data to the multipliers. Multiplexer **928** receives pixel coordinates X, Y, and Z. Multiplexer **930** receives texture coordinates S1, T1, and R1, while multiplexer **932** receives texture coordinates S2, T2, and R2. Multiplexer **934** is used to received texture coordinates Q1 and Q2.

Multiplier A **936** multiplies the pixel coordinates with the inverted depth value from W FIFO1 **926**. One of the pixel coordinates is sent to multiplier A **936** each clock cycle. Multiplication of the pixel coordinates by multiplier A **936** takes place over three clock cycles. In this example, the pixel coordinates are multiplied by the inverted depth value W in the following order: X, Y, and Z in these examples. During the time in which the X coordinate value is being multiplied by $1/W$, latches **944** and **946** latch values for Y and Z. In the next clock cycle, the value for Z is latched in latch **946**, while the Y value is being multiplied by $1/W$ in multiplier A **936**. In the third clock cycle, the coordinate value for Z is multiplied by $1/W$. In these examples, multipliers A **936**, multiplier B **938**, multiplier C **940**, and multiplier D **942** multiply values using a two value or two clock cycle operation. As a result, processing of the pixel coordinates by multiplier A **936** takes five clock cycles.

25 Multiplier B **938** is used to multiply texture
coordinates S1, T1, and R1 by 1/W. These coordinates are
all processed within three clock cycles. The coordinates
are multiplied in the following order in these examples:
S1, T1, and R1. Multiplier C **940** is used to multiply
30 texture coordinates S2, T2, and R2 by 1/W. These

Docket No. AUS000111US1

coordinates are all processed within three clock cycles. The coordinates are multiplied in the following order in these examples: S2, T2, and R2. Multiplier D **942** is used to multiply the texture coordinates Q1 and Q2 by 1/W.

- 5 The multiplication of these two coordinates is performed over two clock cycles with coordinate Q1 being multiplied first in these examples.

The outputs from multipliers A **936**, multiplier B **938**, multiplier C **940**, and multiplier D **942** -are sent to
10 multiplexers **974-994**. These multiplexers are used to send the processed pixel and texture coordinates to the appropriate places within fragment FIFO2 **920**. These FIFO entries are located in fragment FIFO **920**. The pixel coordinates are placed into FIFO entries **901**, **903**, and
15 **905**. The texture coordinates are placed into FIFO entries **907-921**.

Further, multiplexers **974-994** may be used to receive values directly from fragment FIFO1 **906** in the case that the perspective division unit is disabled. In this case,
20 the values from fragment FIFO1 **906** are passed directly to fragment FIFO2 **920**. From fragment FIFO2 **920**, these values are passed to a viewport transformation unit, such as viewport transformation unit **426** in **Figure 4**.

Turning now to **Figure 10**, a diagram illustrating
25 incoming coordinates and outgoing coordinates is depicted in accordance with a preferred embodiment of the present invention. Table **1000** illustrates incoming coordinate variables for pixel coordinates and texture coordinates. These are values received by a perspective division unit,
30 such as the perspective division unit illustrated in

Docket No. AUS000111US1

Figures 9A and 9B. Incoming pixel coordinate variables are X, Y, and Z, while the incoming texture coordinate variables are S0, T0, R0, Q0, S1, T1, R1, and Q1. Further, a depth value W is used in the perspective division unit. Outgoing pixel coordinates are X/W, Y/W, and Z/W. The outgoing texture coordinates are S0/W, T0/W, R0/W, Q0/W, S1/W, T1/W, R1/W, and Q1/W. As described above, an inverted depth value for W is multiplied with the incoming coordinates in these examples.

Turning now to **Figure 11**, a diagram of a state machine used to control a first stage in the perspective division unit is depicted in accordance with a preferred embodiment of the present invention. State machine **1100** is an example of a state machine, which may be used to handle a first stage, such as that formed by FIFO1 control **904** and fragment FIFO1 **906** in **Figures 9A and 9B**. More specifically, state machine **1100** is used to handle reciprocation of the depth value W. The various signals illustrated in state machine **1100** correspond to the signals illustrated in **Figures 9A and 9B**.

The process begins in ready state **ST0** and proceeds to state **ST1** if T_FG_VALID, FIFO1_READY, /T_FG_CDSELECT, and ENABLE_PD. The ENABLE_PD is used to enable the stage to function. T_FG_CDSELECT is the cdselect command illustrated in **Figure 8**. The symbol "/" indicates that the signal T_FG_CDSELECT is in a not or inverted state. In response to these conditions, state machine **1100** resets SM1_RDY and SM1_W_VLD, which are ready and valid signals respectively. The ready signal is sent to AND gate **910** in **Figure 9** and indicates the system is ready to

Docket No. AUS000111US1

receive data. When it is reset, the system is not ready to receive data. Thereafter, state machine **1100** shifts from **ST1** to state **ST2** and then to state **ST3** and to state **ST4** on each clock cycle. These states represent the
 5 clock cycles during which the depth value W is inverted. In other words, each state shift occurs on a clock cycle.

State machine **1100** shifts to state **ST5** if FIFO1, such as fragment FIFO1 **906** in **Figures 9A** and **9B**, is half full. The fog factor generation unit in this example
 10 contains two stages. When a first vertex is received, the unit is half full and is able to receive one more vertex for processing. The valid signal is to tell FIFO **926** in **Figure 9** to load the data from reciprocator **924**. If FIFO1 is empty, state machine **1100** shifts from state
 15 **ST4** back to ready state **ST0** and sets SM1_RDY and SM1_W_VLD. In this example, all active signals are high. For example, a signal is ready if the signal is high.

In state **ST5**, state machine **1100** returns to state **ST0** and sets the signal SM1_RDY and resets the signal
 20 SM1_W_VLD. From state **ST0**, state machine **1100** may shift to state **ST5** if T_FG_VALID, FIFO1_READY, T_FG_CDSELECT, and SM1_W_VLD. In shifting from ready state **ST0** to state **ST5**, state machine **1100** sets SM1_RDY and resets SM1_W_VLD.

25 Turning now to **Figure 12**, a diagram of a state machine used to control a second stage in the perspective division unit is depicted in accordance with a preferred embodiment of the present invention. State machine **1200** is an example of a state machine, which may be used to
 30 handle a second stage, such as that formed by FIFO2

005450-061300

Docket No. AUS000111US1

control **918** and fragment FIFO2 **920** in **Figures 9A** and **9B**. More specifically, state machine **1200** is used to handle multiplication of the pixel coordinates and texture coordinates with the inverted depth value generated in the first stage.

State machine **1200** begins in ready state **S0** and shifts to state **S1** if FIFO1_VALID, FIFO2_READY_OUT, /FIFO1_CDSELECT, and ENABLE_PD are present. In shifting to state **S1**, state machine **1200** resets SM2_RDY and SM2_ZR_VLD. The SM2_RDY signal indicates the system is all ready to receive for processing. Resetting this signal indicates that processing is occurring and data cannot be received. The SM2_ZR_VLD indicates that the Z value has been multiplied and needs to be put into the FIFO. State machine **1200** then shifts to state **S2**. In shifting from state **S2** to state **S3**, state machine **1200** sets SM2_XSQ_VLD. State machine **1200** shifts from state **S3** to state **S4** and resets SM2_XSQ_VLD and sets SM2_YTQ_VLD. These two signals indicate that x and y values have been processed and are ready to be placed in the FIFO. When a signal is reset, it is no longer ready.

From state **S4**, state machine **1200** shifts to state **S5** if FIFO2 is half full. Otherwise, if FIFO2 is empty, state machine **1200** shifts back to ready state **S0** and sets SM2_RDY, resets SM2_YTQ_VLD, and sets SM2_ZR_VLD.

From ready state **S0**, state machine **1200** may shift to state **S5** if FIFO1_VALID, FIFO2_READY_OUT, FIFO1_CDSELECT, SM2_ZR_VLD, SM2_RDY, and SM2_ZR_VLD are present. This condition occurs when vertice is followed by a command and provides time to process the command. In shifting to

Docket No. AUS000111US1

state **S5** from ready state **S0**, state machine **1200** resets SM2_RDY and sets SM2_ZR_VLD.

Turning now to **Figure 13**, a diagram illustrating data flow is depicted in accordance with a preferred embodiment of the present invention. The data flow illustrated in **Figure 13** is for data passing through the perspective division unit shown in **Figures 9A** and **9B**.

Row **1300** identifies clock cycles, while column **1302** identifies devices and components. In this example, in clock cycle zero, a depth value W_1 is received by a reciprocator ($1/W$), such as reciprocator **924** in **Figure 9B**. Five clock cycles pass before the reciprocal of this value is generated. On clock cycle 5, the value $1/W$ is placed into FIFO1, which is fragment FIFO1 **908**. The reciprocator receives a second depth value, W_2 , for processing. In clock cycle 7, multiplier A begins multiplying X by $1/W$. Multiplier A is implemented as multiplier A **936**. Multiplier B multiplies texture coordinate S1 with $1/W$ and is implemented as multiplier B **938**. Multiplier C multiplies texture coordinate S2 with $1/W$ and is implemented as multiplier C **940**. Multiplier D multiplies texture coordinate Q1 with $1/W$ and is implemented as multiplier D **940**.

The multipliers, in these examples, are two stage multipliers requiring two clock cycles to generate a result. In clock cycle eight, in this example, multiplier A receives the Y coordinate and multiplies it with $1/W$, while the final multiplication process occurs for the X coordinate. Multiplier B receives texture coordinate T1, multiplier C receives texture coordinate T2, and multiplier D receives texture coordinate Q2.

Docket No. AUS000111US1

These coordinates are multiplied by $1/W$. As can be seen, the multiplication continues for the coordinates previously received. In clock cycle nine, multiplier A receives pixel coordinate Z, multiplier B receives texture coordinate R1, and multiplier C receives texture coordinate R2. Multiplier D does not receive another coordinate at this time because it is connected to a two input multiplexer as compared to the other multipliers, which are connected to three input multiplexers. No other values are present to be sent to multiplexer D in clock cycle nine. Multiplexer D finishes the multiplication of texture coordinate Q2 with $1/W$.

In clock cycle ten, the reciprocator receives another depth value W_3 . Additionally, a reciprocal of depth value W_2 is received by FIFO1. No new pixel or texture coordinates are received in clock cycle ten, instead multiplier A, multiplier B, and multiplier C complete multiplication of the coordinate values received. In clock cycle eleven, the multiplied pixel coordinates and texture coordinates are received or placed into FIFO2, which is implemented as fragment FIFO2 920 in **Figures 9A** and **9B**.

The reciprocator processes the depth value in the first stage of the perspective division unit and the pixel coordinates and texture coordinates being multiplied with the reciprocal of the depth value in the second stage of the perspective division unit. Once started, pixel and texture coordinates for a vertex may be output every five clock cycles. The latency, in these examples, is twelve clock cycles before a vertex is first output when the perspective division unit receives data

Docket No. AUS000111US1

for processing. Depending on the particular design of the reciprocator, more or less clock cycles may occur before the reciprocal value is generated.

Thus, the mechanism of the present invention allows
5 for correction or adjustment of pixel coordinates and texture coordinates with a depth value W. The mechanism of the present invention allows for both pixel coordinates and texture coordinates to be adjusted at the same time. Further, less time is required to perform the
10 adjustment because the adjustment is performed using multiplication, rather than division of the coordinates.

It is important to note that while the present invention has been described in the context of a fully
15 functioning data processing system, those of ordinary skill in the art will appreciate that the processes of the present invention are capable of being distributed in the form of a computer readable medium of instructions and a variety of forms and that the present invention
20 applies equally regardless of the particular type of signal bearing media actually used to carry out the distribution. Examples of computer readable media include recordable-type media, such as a floppy disk, a hard disk drive, a RAM, CD-ROMs, DVD-ROMs, and
25 transmission-type media, such as digital and analog communications links, wired or wireless communications links using transmission forms, such as, for example, radio frequency and light wave transmissions. The computer readable media may take the form of coded
30 formats that are decoded for actual use in a particular data processing system.

The description of the present invention has been presented for purposes of illustration and description, and is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. The embodiment was chosen and described in order to best explain the principles of the invention, the practical application, and to enable others of ordinary skill in the art to understand the invention for various embodiments with various modifications as are suited to the particular use contemplated.

Docket No. AUS000111US1

CLAIMS:

What is claimed is:

- 5 1. A method in a graphics adapter for displaying an object, the method comprising:
- receiving position coordinates and texture coordinates for the object;
 - inverting a depth coordinate associated with the position and the texture coordinates to form an inverted coordinate;
 - 10 multiplying the position coordinates and the texture coordinates by the inverted coordinate to form adjusted position coordinates and adjusted texture coordinates;
 - 15 and
 - displaying the object using the adjusted position coordinates and the adjusted texture coordinates.
- 20 2. A graphics pipeline comprising:
- an input, wherein the input receives graphics data, wherein the graphics data includes position coordinates and a depth coordinate for an object;
 - an output, wherein the output transmits processed graphics data;
 - 25 a plurality of processing elements, wherein the plurality of processing elements generates the processed graphics data, wherein a first processing element within the plurality of processing elements is connected to the input and a last processing element within the plurality
 - 30 of processing elements is connected to the output, and wherein a selected processing element within the

Docket No. AUS000111US1

plurality of processing element receives the position coordinates and the depth coordinate, inverts the depth coordinate to form an inverted depth coordinate, and multiplies the position coordinates by the inverted depth coordinate.

3. The graphics pipeline of claim 2, wherein the selected processing element comprises:

a first stage, wherein the first stage receives the position coordinates and the depth coordinate and inverts the depth coordinate; and

a second stage, wherein the second stage multiplies the position coordinates by the inverted depth coordinate.

4. The graphics pipeline of claim 2, wherein the graphics data includes texture coordinates and wherein the selected processing element multiplies the texture coordinates by the inverted depth coordinate.

5. The graphics pipeline of claim 4, wherein the selected processing element comprises:

a first stage, wherein the first stage receives the position coordinates, the texture coordinates, and the depth coordinate and inverts the depth coordinate; and

a second stage, wherein the second stage multiplies the position coordinates and the texture coordinates by the inverted depth coordinate.

6. The graphics pipeline of claim 5, wherein processing of the position coordinates and the texture coordinates

Docket No. AUS000111US1

for an object occurs within five clock cycles.

7. A graphics adapter comprising:
- an input configured to receive graphics data;
 - 5 a frame buffer, wherein processed graphics data is stored for display;
 - a raster engine connected to the input and to the frame buffer, wherein the raster engine rasterizes the processed graphics data for display; and
 - 10 a geometry engine connected to the raster engine, wherein the geometry engine receives the graphics data from the raster engine, processes the graphics data to form the processed graphics data, and returns the processed graphics data to the raster engine and wherein the
 - 15 geometry engine includes a set of processing elements in which a selected processing element within the set of processing elements receives position coordinates and a depth coordinate, inverts the depth coordinate to form an inverted depth coordinate, and multiplies the position
 - 20 coordinates by the inverted depth coordinate.

8. The graphics adapter of claim 7, wherein the graphics data includes texture coordinates and wherein the selected processing element multiplies the texture
- 25 coordinates by the inverted depth coordinate.

9. The graphics adapter of claim 8, wherein the selected processing element comprises:
- a first stage, wherein the first stage receives the
 - 30 position coordinates, the texture coordinates, and the depth coordinate and inverts the depth coordinate; and

Docket No. AUS000111US1

a second stage, wherein the second stage multiplies the position coordinates and the texture coordinates by the inverted depth coordinate.

- 5 10. The graphics adapter of claim 7, wherein processing of position coordinates and texture coordinates for an object occurs within five clock cycles.

- 10 ~~11.~~ A graphics adapter for displaying an object, the graphics adapter comprising:
- receiving means for receiving position coordinates and texture coordinates for the object;
 - inverting means for inverting a depth coordinate associated with the position and the texture coordinates
 - 15 to form an inverted coordinate;
 - multiplying means for multiplying the position coordinates and the texture coordinates by the inverted coordinate to form adjusted position coordinates and adjusted texture coordinates; and
 - 20 displaying means for displaying the object using the adjusted position coordinates and the adjusted texture coordinates.

- 25 ~~12.~~ A computer program product in a computer readable medium for displaying an object, the computer program product comprising:
- first instructions for receiving position coordinates and texture coordinates for the object;
 - second instructions for inverting a depth coordinate
 - 30 associated with the position and the texture coordinates to form an inverted coordinate;

0054630-061500

third instructions for multiplying the position coordinates and the texture coordinates by the inverted coordinate to form adjusted position coordinates and adjusted texture coordinates; and

- 5 fourth instructions for displaying the object using
the adjusted position coordinates and the adjusted
texture coordinates.

Docket No. AUS000111US1

ABSTRACT OF THE DISCLOSURE

**HARDWARE PERSPECTIVE CORRECTION OF PIXEL
COORDINATES AND TEXTURE COORDINATES**

5
10
15
20

A method and apparatus in a graphics system. The graphics system includes an input, wherein the input receives graphics data, wherein the graphics data includes position coordinates and a depth coordinate for an object. An output is present in which the output transmits processed graphics data. The graphics system also contains a plurality of processing elements, wherein the plurality of processing elements generates the processed graphics data. A first processing element within the plurality of processing elements is connected to the input and a last processing element within the plurality of processing elements is connected to the output. A selected processing element within the plurality of processing element receives the position coordinates and the depth coordinate, inverts the depth coordinate to form an inverted depth coordinate, and multiplies the position coordinates by the inverted depth coordinate.

005790-06500

AUS000111US1

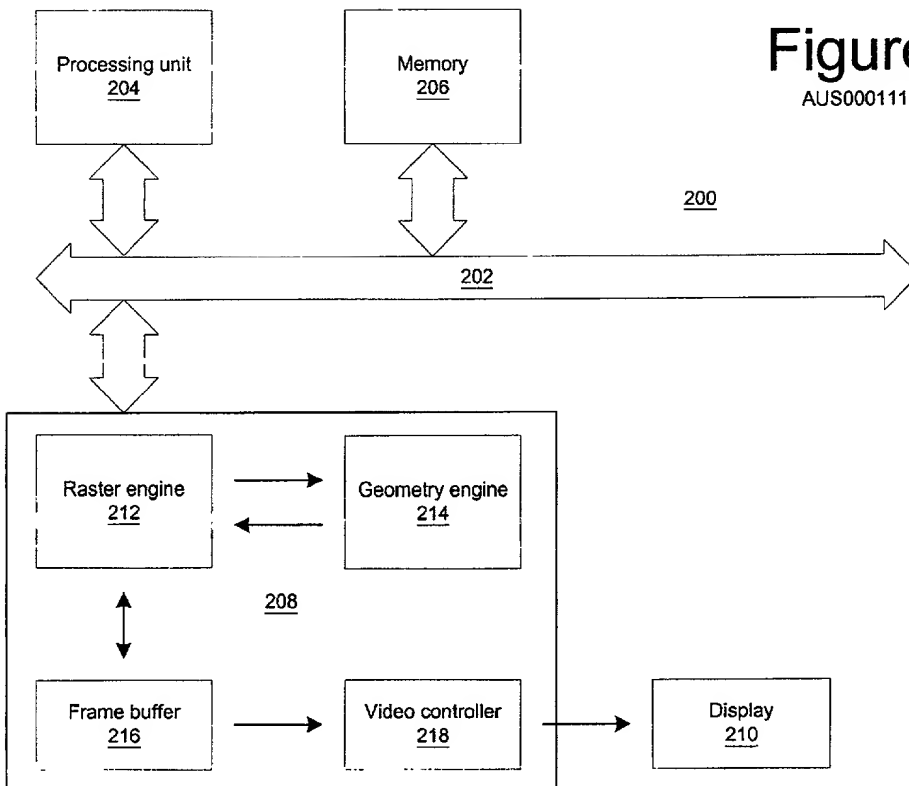


Figure 3

AUS000111US1


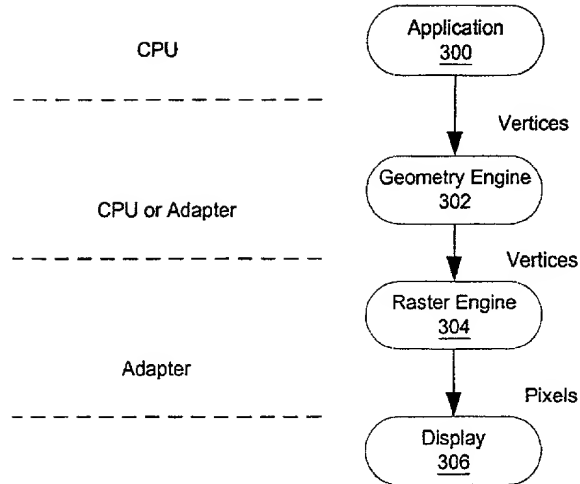


Figure 4

AUS000111US1

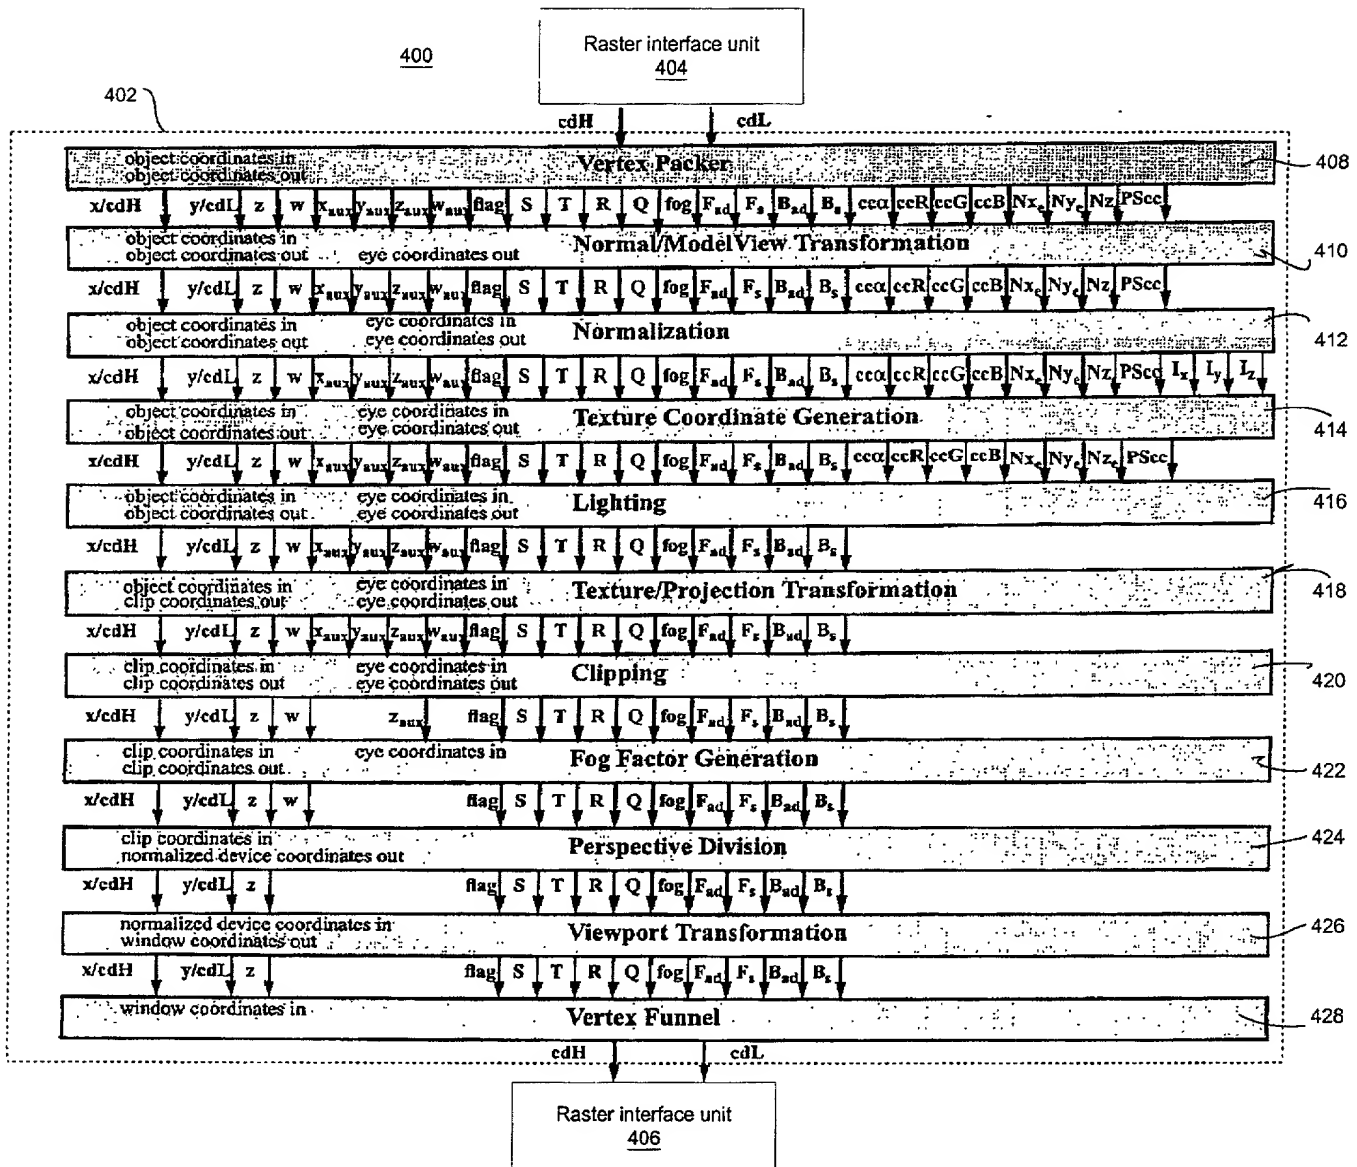

AUS000111US1

500

[illegible]

1. Based on the location of the vertex within the geometry pipeline, the primary coordinate is either an object, clip, normalized device, or screen coordinate. See Figure 2.
2. Several stages in the geometry pipeline require both primary and auxiliary (eye) coordinates.
3. The normalized eye coordinate is generated by the normalization unit and is only useful to the texture coordinate generation unit.

AUS000111US1

600

Stage <small>602</small>	Fragments Affected <small>604</small>	Associated Command <small>606</small>
Normal/ModelView Transformation	$x_{Aux}, y_{Aux}, z_{Aux}, w_{Aux}$ n_x, n_y, n_z	ENABLE_NORMALXF ENABLE_MDLVW XF
Normalization	n_x, n_y, n_z i_x, i_y, i_z	ENABLE_NORMALIZEN ENABLE_TCGSPHERE
Texture Coordinate Generation	s, t, r, q	ENABLE_TCG
Lighting	f_{ad}, f_s, b_{ad}, b_s	
Texture/Projection Transformation	x, y, z, w s, t, r, q	ENABLE_TEXTUREXF ENABLE_PROJECTXF
Clipping	all	ENABLE_CLIPPING
Fog Factor Generation	fog	ENALBE_FOG
Perspective Division	x, y, z s, t, r, q	ENABLE_PERSDIV ENABLE_TEXPERSDIV
Viewport Transformation	x, y, z	ENABLE_VIEWPORTXF

Figure 7

AUS000111US1

Fragments Required Per Stage

700

Stage 702	Fragments Required 704
Normal/ModelView Transformation	x, y, z, w, n _x , n _y , n _z
Normalization	xAux, yAux, zAux, wAux, n _x , n _y , n _z
Texture Coordinate Generation	x, y, z, w, xAux, yAux, zAux, wAux, i _x , i _y , i _z
Lighting	n _x , n _y , n _z cc _a , cc _r , cc _g , cc _b PSc _c , f _{ad} , f _s , b _{ad} , b _s
Texture/Projection Transformation	xAux, yAux, zAux, wAux, s, t, r, q
Clipping	all
Fog Factor Generation	zAux
Perspective Division	x, y, z, w, s, t, r, q
Viewport Transformation	x, y, z

Figure 8

AUS000111US1

802 804 806 808 810 812

Signal	No transfer	No transfer	Command	Data	Vertex
valid	0	x	1	1	1
ready	x	0	1	1	1
cmdBit	x	x	1	0	x
cdSelect ¹	x	x	1	1	0

800

Figure 9A

AUS000111US1

900

Fog

908

923

925

005T9D" 0E9H6S6D


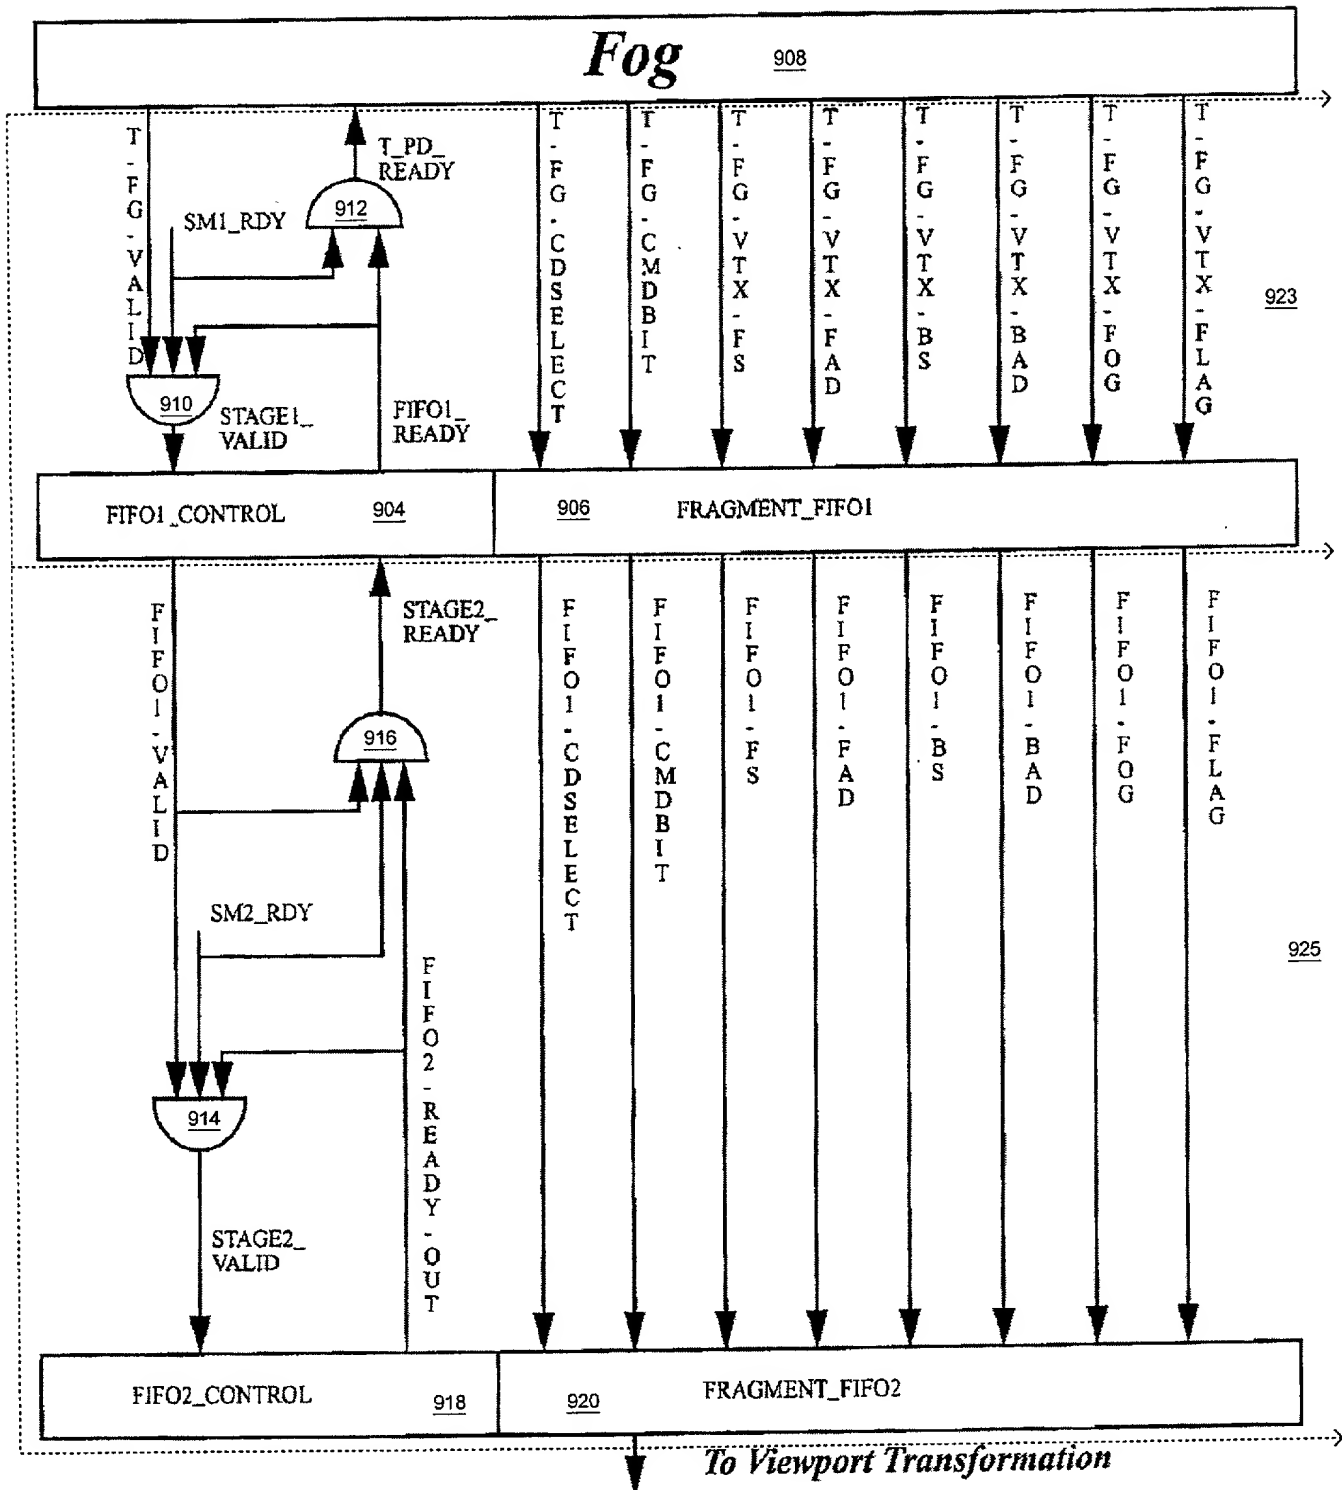


Figure 9B

AUS000111US1

902

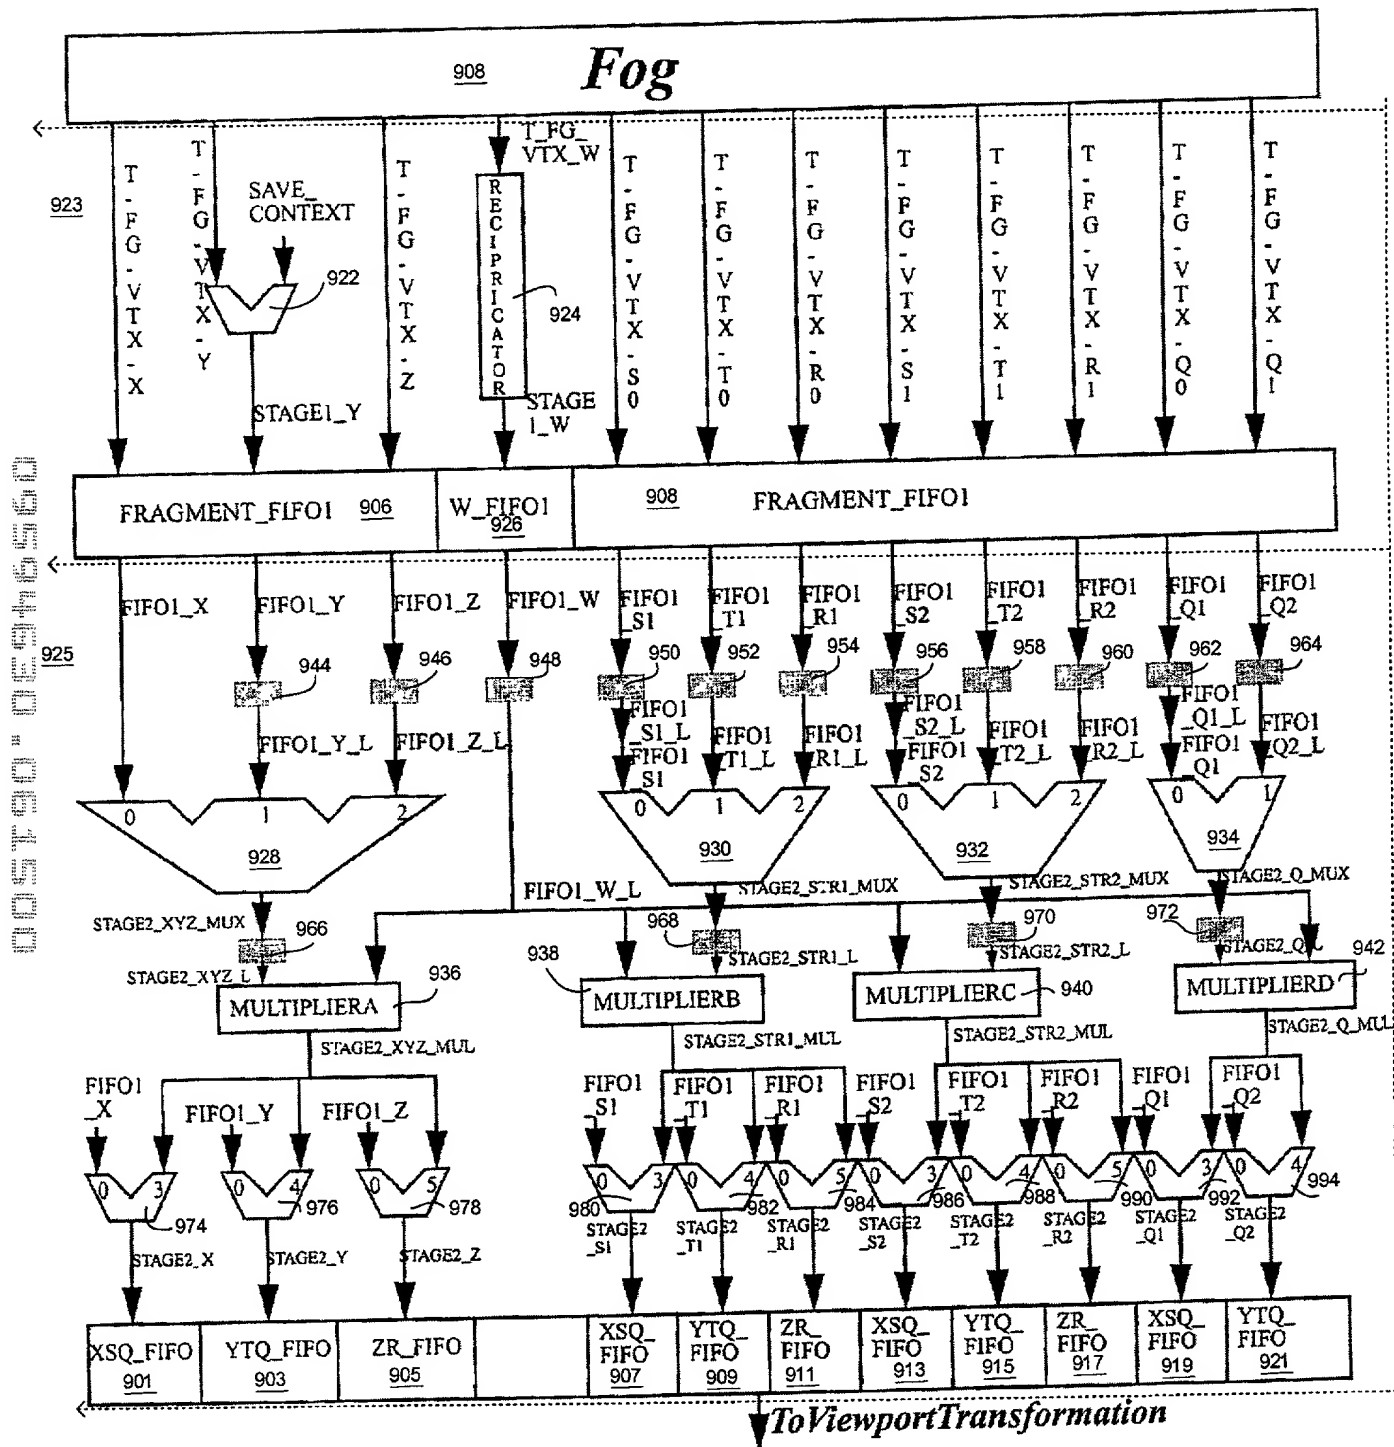

Incoming Coordinate	X	Y	Z	W	S0	T0	R0	Q0	S1	T1	R1	Q1
Outgoing Coordinate	X/W	Y/W	Z/W		S0/W	T0/W	R0/W	Q0/W	S1/W	T1/W	R1/W	Q1/

Figure 10
AUS000111US1


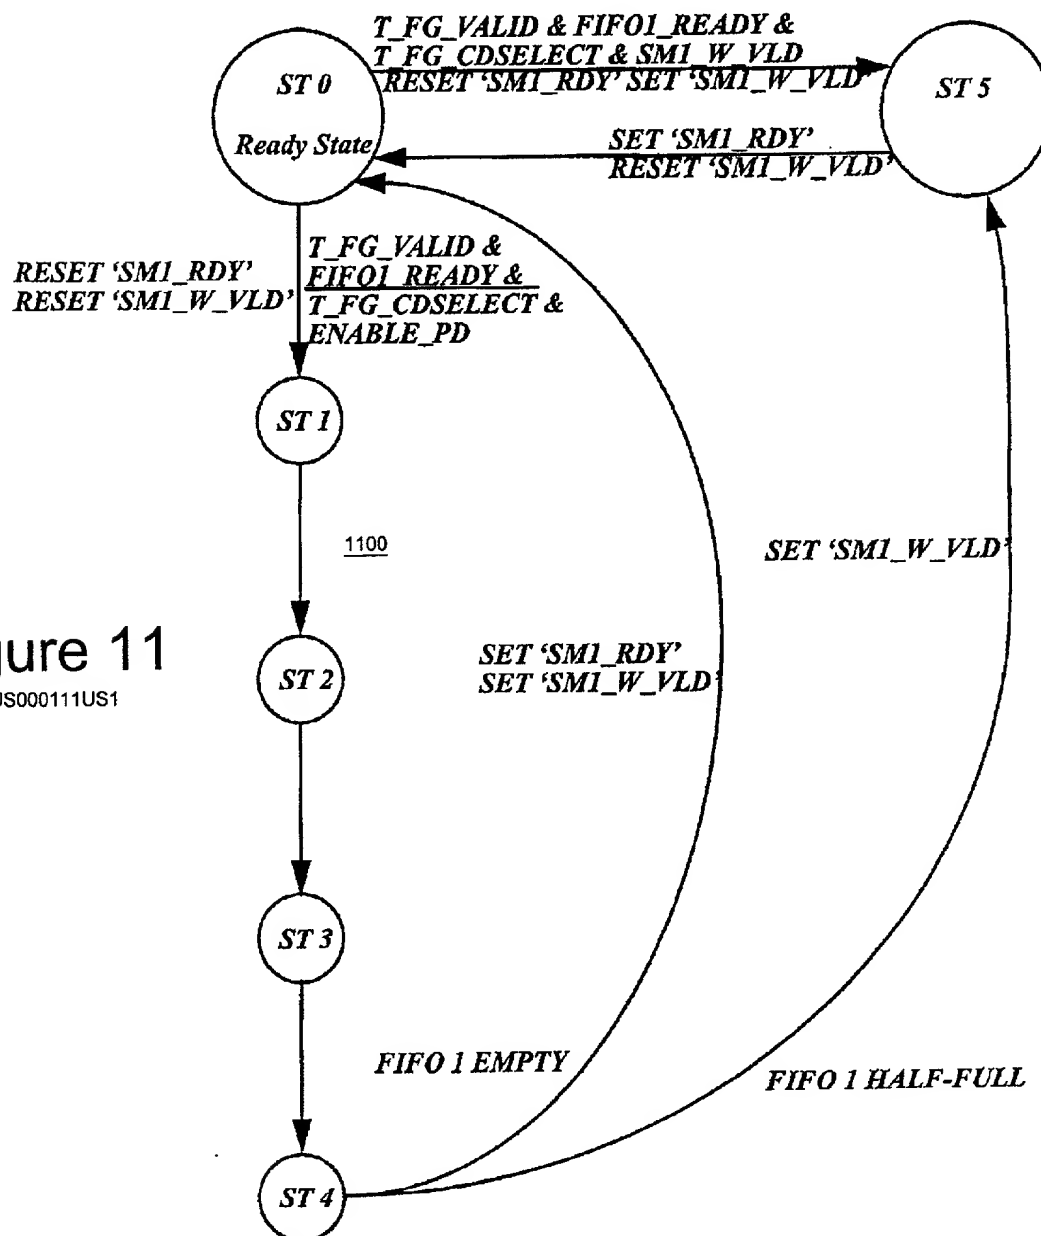


Figure 11
AUS000111US1

005790" 02946560

Figure 12

AUS000111US1

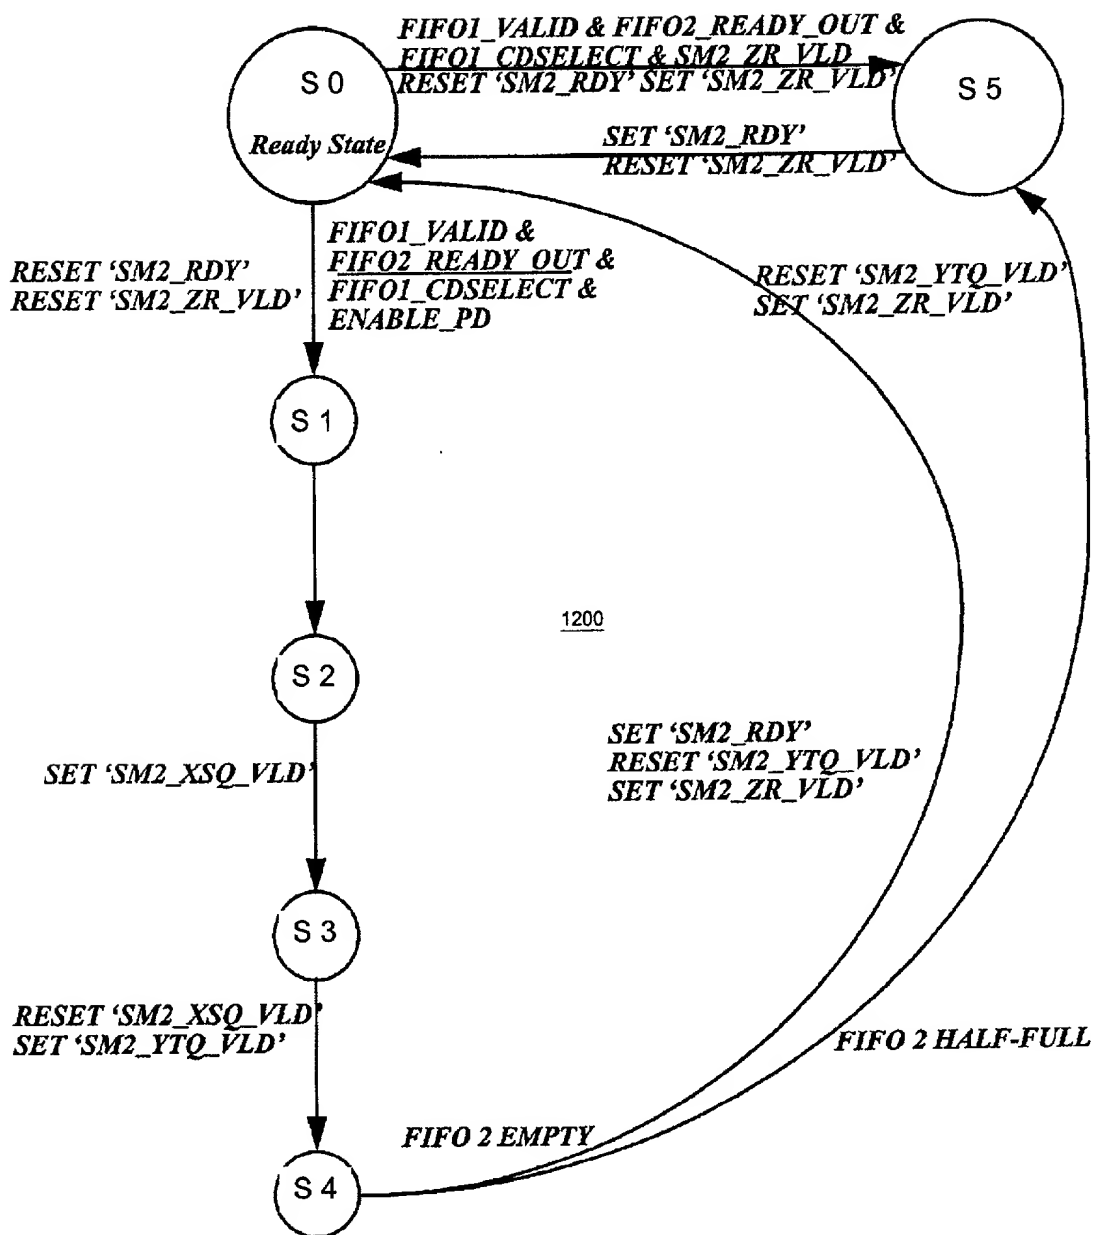

005790" 0E946560

AUS000111US1

1302

**DECLARATION AND POWER OF ATTORNEY FOR
PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**HARDWARE PERSPECTIVE CORRECTION OF PIXEL COORDINATES
AND TEXTURE COORDINATES**

the specification of which (check one)

X is attached hereto.

___ was filed on _____
as Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Priority Claimed

____ Yes ____ No
(Number) (Country) (Day/Month/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial #) (Filing Date) (Status)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John W. Henderson, Jr., Reg. No. 26,907; Thomas E. Tyson, Reg. No. 28,543; James H. Barksdale, Jr., Reg. No. 24,091; Casimer K. Salys, Reg. No. 28,900; Robert M. Carwell, Reg. No. 28,499; Douglas H. Lefevre, Reg. No. 26,193; Jeffrey S. LaBaw, Reg. No. 31,633; David A. Mims, Jr., Reg. 32,708; Volel Emile, Reg. No. 39,969; Anthony V. England, Reg. No. 35,129; Leslie A. Van Leeuwen, Reg. No. 42,196; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; Marilyn S. Dawkins, Reg. No. 31,140; Mark E. McBurney, Reg. No. 33,114; Duke W. Yee, Reg. No. 34,285; Colin P. Cahoon, Reg. No. 38,836; Stephen R. Loe, Reg. No. 43,757; Stephen J. Walder, Reg. No. 41,534; Charles D. Stepps, Jr., Reg. No. 45,880; and Stephen R. Tkacs, Reg. No. P-46,430.

Send correspondence to: Duke W. Yee, Carstens, Yee & Cahoon, LLP, P.O. Box 802334, Dallas, Texas 75380 and direct all telephone calls to Duke W. Yee, (972) 367-2001

FULL NAME OF SOLE OR FIRST INVENTOR: Richard Anthony Marino

INVENTORS SIGNATURE: Richard Anthony Marino

DATE: 6/14/2000

RESIDENCE: 4203 Kingsburg Drive
Round Rock, Texas 78681

CITIZENSHIP: United States

POST OFFICE ADDRESS: SAME AS ABOVE